



# T.C. BOLT™ | INSTRUCTIONS

## TITAN COUPLING BOLT™

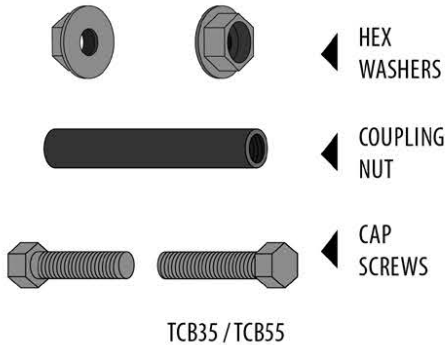

## TOOLS NEEDED



9/16" SOCKET




6 POINT SOCKET  
RECOMMENDED



DRILL



C-CLAMP



POST LEVEL




1/2" DRILL BIT



RATCHET


## POST BRACKET



TIDP443 / 663

SOLD SEPARATELY


1

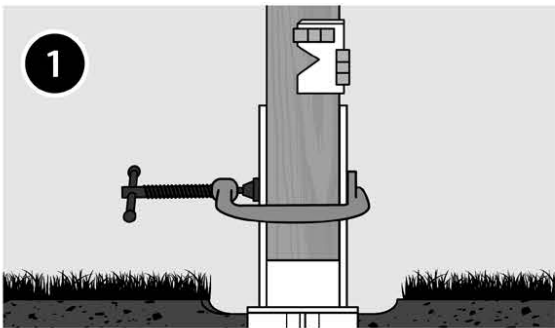

Plumb Post USING Post Level and C-Clamp.


START

2

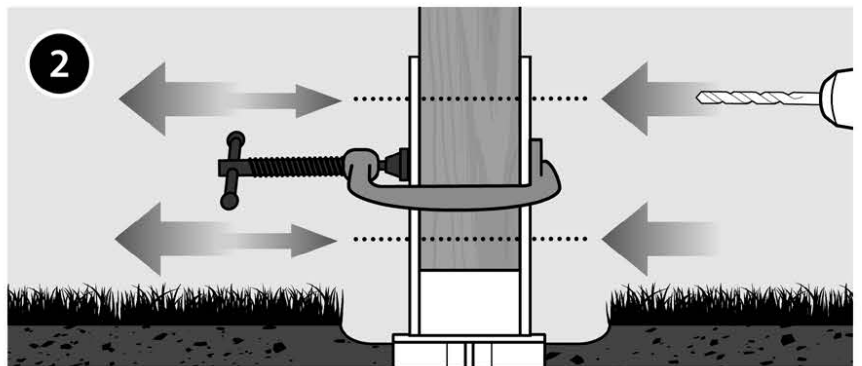


Drill through CENTER HOLE, POST and out the OPPOSITE HOLE.  
Drill from BOTH DIRECTIONS if necessary.

3

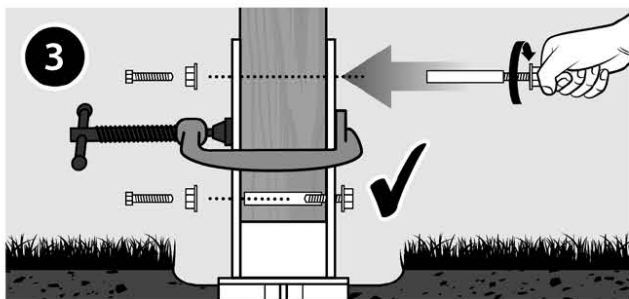


Thread ONE Cap Screw through Hex Washer partially into Coupling Nut. Insert Screw and Nut into Post. Thread OTHER Cap Screw with Hex Washer into Coupling Nut.

4

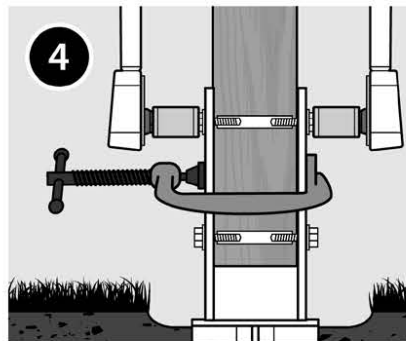

Use TWO Ratchets and 9/16" Sockets to Tighten Cap Screws and Secure Post.

5



Remove C-Clamp.

FINISH

TITAN COUPLING BOLT™ TCB35 / TCB55

**QUESTIONS? CONTACT US AT 1-866-577-8868** IN NO EVENT SHALL TITAN BUILDING PRODUCTS BE LIABLE FOR ANY LOSS OR DAMAGE, DIRECT OR OTHERWISE, WHICH RESULTS FROM THE IMPROPER INSTALLATION OR USE OF THIS PRODUCT. IF FOR ANY REASON TITAN BUILDING PRODUCTS BECOMES LIABLE FOR LOSS OR DAMAGE, DIRECT OR OTHERWISE, THE AGGREGATE LIABILITY OF TITAN BUILDING PRODUCTS SHALL BE LIMITED TO THE RETAIL PURCHASE PRICE OF THE PRODUCTS.

T 1-866-577-8868

**TITAN** BUILDING PRODUCTS®  
THE ART OF BUILDING  
More beautiful decks... Real easy.



www.titanbp.com